


ROV Operated Valve

Panel mounted Alu Actuator version

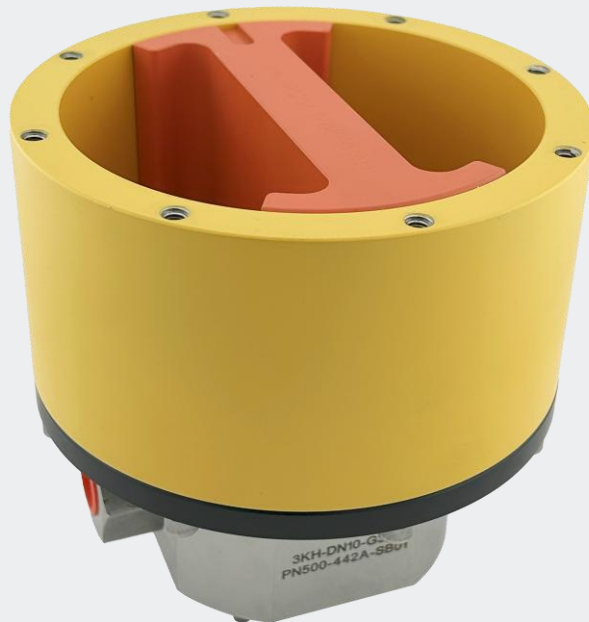

- Excess torque not transferred to valve stem
- Wide range of fluid compatibility
- Service and user friendly
- 2, 3 and 4 way valve types available
- Stainless steel construction
- Rated to 3000MSW
- Custom design available

Specifications

ROV Operated Valve Alu Actuator


General technical specifications

Type	Panel Mounted ROV Operated Valve
Part number	See selection table below
Fluid	Water Glycol and Mineral Oil based subsea fluids
Operating temperature	-10°C/ + 70°C (14°F / 158°F)

Materials

Body material	Alu6082 (Xylan Surface Treated)
Valve body material	Stainless Steel

Dimensions

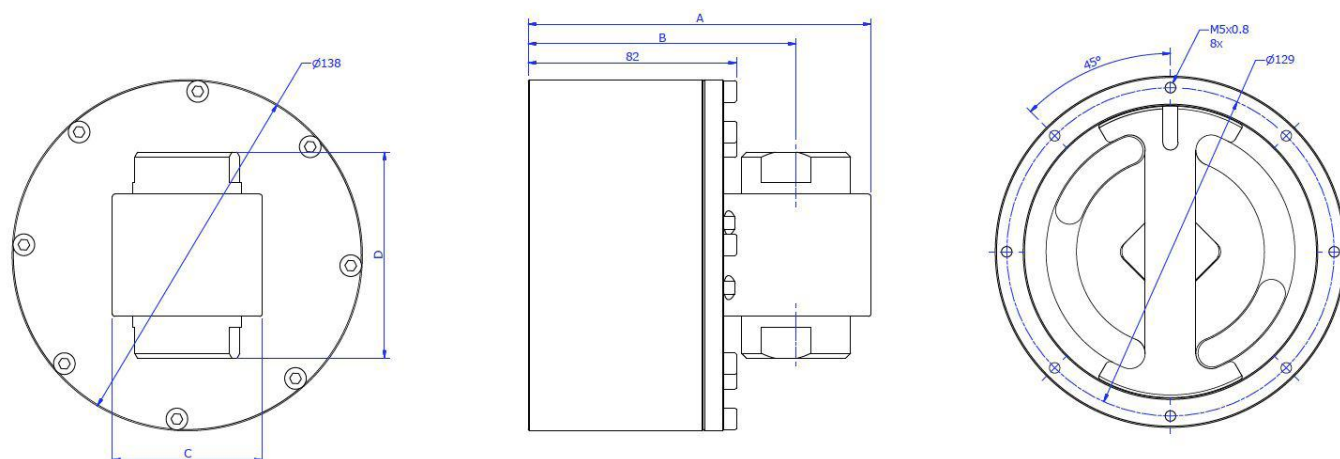

Type	A	B	C	D	E	Weight
Alu ROV Actuator – 1/4" Ball Valve 500Bar	135	104	54	72	1/4" BSP	4kg
Alu ROV Actuator – 3/8" Ball Valve 500Bar	135	104	54	72	3/8" BSP	4kg
Alu ROV Actuator – 1/2" Ball Valve 500Bar	140	105,5	59	81	1/2" BSP	4,3kg
Alu ROV Actuator – 3/4" Ball Valve 400Bar	155	114	74	98	3/4" BSP	5,6kg
Alu ROV Actuator – 1" Ball Valve 350Bar	164	118,5	83	106	1" BSP	6,4kg
Alu ROV Actuator – 1-1/4" Ball Valve 350Bar	180	126,5	99	127	1-1/4" BSP	8,2kg
Alu ROV Actuator – 1/4" – MP Valve 20K PSI	25,4	165	38,1	140	1/4" MP F	4,2kg
Alu ROV Actuator – 3/8" – MP Valve 20K PSI	25,4	165	38,1	140	3/8" MP F	4,2kg
Alu ROV Actuator – 1/2" – MP Valve 20K PSI	25,4	165	38,1	140	1/2" MP F	4,2kg

Note: The specification details are illustrative for marketing purposes only.

Actual equipment may be different as a result of product improvement or other reasons.

Specific interface and performance information should be reconfirmed at time of order placement.

Specifications

ROV Operated Valve Alu Actuator

Ordering codes

Type	Ordering number	Pressure rating	Porting (Female)
Alu ROV Actuator – 1/4" Ball Valve 500Bar	110015	500Bar (7.250PSI)	1/4" BSPP
Alu ROV Actuator – 3/8" Ball Valve 500Bar	109895	500Bar (7.250PSI)	3/8" BSPP
Alu ROV Actuator – 1/2" Ball Valve 500Bar	109925	500Bar (7.250PSI)	1/2" BSPP
Alu ROV Actuator – 3/4" Ball Valve 400Bar	109966	400Bar (5.800PSI)	3/4" BSPP
Alu ROV Actuator – 1" Ball Valve 350Bar	109949	345Bar (5.000PSI)	1" BSPP
Alu ROV Actuator – 1-1/4" Ball Valve 350Bar	110001	345Bar (5.000PSI)	1-1/4" BSP
Alu ROV Actuator – 1/4" – MP Valve 20K PSI	109982	1379Bar (20.000PSI)	1/4" MP SF250CX
Alu ROV Actuator – 3/8" – MP Valve 20K PSI	110019	1379Bar (20.000PSI)	3/8" MP SF375CX
Alu ROV Actuator – 9/16" – MP Valve 20K PSI	109968	1379Bar (20.000PSI)	9/16" MP SF562CX20